


APC Back-UPS® RS 1300/1500

High performance battery backup and protection for office computers

The Back-UPS 1300 and 1500 provide you with abundant battery backup power, allowing you to work through medium and extended length power outages. They also safeguard your equipment from damaging surges and spikes that travel along utility, phone, network and coax cable lines. The Back-UPS 1300 and 1500 also feature “boost” automatic voltage regulation (AVR), which instantly adjusts low voltages to safe levels, so you can work indefinitely during undervoltage situations. Additional standard features make these the perfect units to protect your productivity from the constant threat of power problems and lost data.

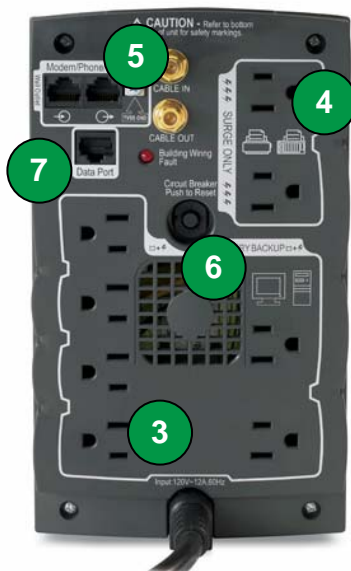

Product Features:

- 1 **LCD (Liquid Crystal Display)** provides easy to read information about battery and utility conditions.
- 2 **“Boost” Automatic Voltage Regulation** corrects undervoltages without draining the battery, saving battery power for when you need it most – outages.
- 3 **6 “Battery Backup & Surge Protection” Outlets** keep CPU, monitor and other critical devices running when the power goes out.
- 4 **2 “Surge Only” Outlets** protect printers, fax machines or other equipment without reducing battery capacity.
- 5 **Data Line Surge Protection** guards against power surges traveling on phone, Ethernet or coax cable lines.
- 6 **Push Button Circuit Breaker** enables quick recovery from overloads.
- 7 **3 yr Warranty** for European Union countries - 2 years elsewhere, Equipment Protection Policy where applicable (200,000 AUD, 150,000 Euros, 75,000 GBP), free technical phone and online support.
- 8 **Automatic Diagnostic Testing** ensures your unit is ready when you need it.
- 9 **Auto Shutdown Software** allows management of the Back-UPS from your computer via USB or serial interface:
 - Saves files and shuts down system when battery is low
 - Records utility power and battery conditions
 - Allows for customized set up



APC
by Schneider Electric

Back-UPS 1300 & 1500 LCD Specifications

Model Number	BR1300LCD	BR1500LCD
Output		
Output Capacity	1300 VA / 780 Watts	1500 VA / 865 Watts
Output Voltage / Freq. (utility)	120V / 60Hz	120V / 60Hz
Output Voltage / Freq. (battery)	120V / 60Hz	120V / 60Hz
Output Connections	8 total NEMA 5-15R outlets: 6 battery backup & surge 2 surge protection only	8 total NEMA 5-15R outlets: 6 battery backup & surge 2 surge protection only
Waveform Type	Stepped Approximation to Sine Wave	Stepped Approximation to Sine Wave
Input		
Input Voltage / Frequency	120V / 60 Hz	120V / 60 Hz
Input Connection	6 ft cord with NEMA 5-15 plug	6 ft cord with NEMA 5-15 plug
Surge Protection		
AC Power Surge Protection	All outlets	All outlets
Data Line Surge Protection	Analog phone line (phone, fax, modem, DSL) Network line (10/100 Base-T Ethernet) Coax cable (CATV, SATV, modem, A/V)	Analog phone line (phone, fax, modem, DSL) Network line (10/100 Base-T Ethernet) Coax cable (CATV, SATV, modem, A/V)
Physical		
Unit Dimensions (H x W x D)	8.75" x 5.25" x 14.0"	8.75" x 5.25" x 14.0"
Unit Weight	29.7 lbs	30.7 lbs
Shipping Dims. (H x W x D)	12.0" x 9.75" x 18.0"	12.0" x 9.75" x 18.0"
Shipping Weight	32.7 lbs	34.2 lbs
Color	Black	Black
UPC Code	731304247890	731304247913
Battery		
Battery Type	Maintenance-free, sealed lead-acid battery, leakproof	Maintenance-free, sealed lead-acid battery, leakproof
Management		
Alarms	Visual (LCD) and audible alarms	Visual (LCD) and audible alarms
Auto-Shutdown Software	PowerChute Personal Edition (with USB and serial interface)	PowerChute Personal Edition (with USB and serial interface)
Safety		
Certification/Approvals	FCC Part 15 Class B, FCC Part 68, NOM, TUV	FCC Part 15 Class B, FCC Part 68, NOM, TUV

APC by Schneider Electric

132 Fairgrounds Rd
West Kingston, RI 02892
Tel: 800-800-4272
www.apc.com

