



BX7000 MULTI-ACCESS GATEWAY

Product Overview

Mobile operators' networks are increasingly under pressure today, especially the network's backhaul portion. Demand for new bandwidth-hungry services is stretching the existing infrastructure, while declining average revenue per user inhibit investment. Operators need a new approach to mobile backhaul—one that is scalable, flexible, cost effective and ensures a smooth migration to future technologies. The BX7000 Multi-Access Gateway meets these needs. The BX7000 reliably transports TDM, ATM and packet traffic over IP/MPLS using pseudowire technology. Designed for the space and environmental constraints of the cell site, the BX7000 features common uplink types such as copper, Ethernet and DSL to support both legacy (2G and 3G) and next-generation (WiMAX and LTE) mobile technologies.

Product Description

Juniper Networks® BX7000 Multi-Access Gateway effectively addresses the backhaul evolution challenge for mobile operators with the most operationally efficient approach. Competing cell site gateways make the evolution to next-generation (2.5G to 4G) infrastructures very challenging, as they lack the necessary scalability, density, flexibility and reliability, and are complex to deploy and manage. Moreover, the previous generation of cell site gateways are based on older expensive legacy or older IP technologies, which limits roadmaps for enhancement and inhibits the roll out of newer IP-based services. The BX7000 leverages Juniper Networks industry-leading IP/MPLS expertise as well as its circuit emulation expertise for pseudowire support of both ATM and TDM over both IP and MPLS. Designing next-generation backhaul networks based on IP/MPLS will significantly reduce OPEX of mobile operators.

Juniper's end-to-end mobile backhaul solution includes the BX7000, a Circuit Emulation PIC family for Juniper Networks M Series Multiservice Edge Routers and Juniper Networks Junos Scope management framework capabilities, plus the solution is fully aligned with Juniper's Ethernet aggregation solution with Juniper Networks MX Series 3D Universal Edge Routers. This solution extends Juniper's proven IP/MPLS leadership from the IP core to the edge of mobile operator's radio access networks. In addition to addressing operator's OPEX and bandwidth challenges today, the solution paves the way for future migration to 4G technologies.

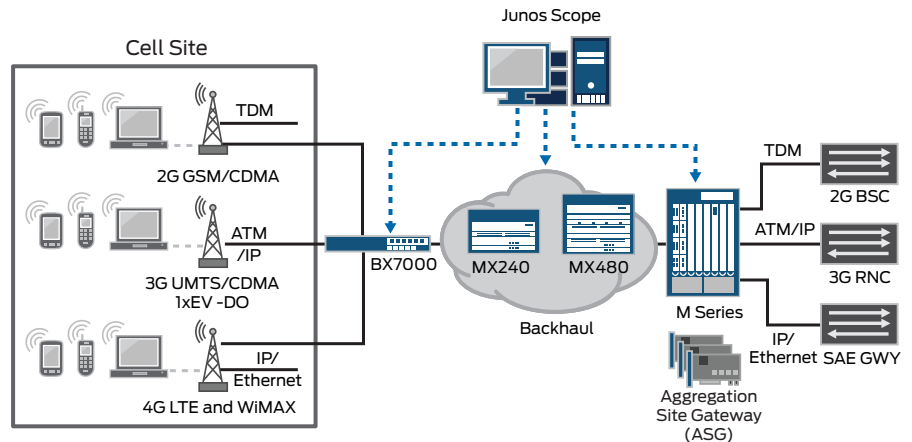


Figure 1: Juniper Networks advanced mobile solutions

Juniper's reputation as an industry leader in service provider routing and IP/MPLS provides the BX7000 with a distinct advantage in the market. The company's position as a trusted partner among mobile operators is evidenced by the fact that 11 of the 12 largest mobile operators have networks built with Juniper Networks products.

Architecture and Key Components

Juniper Networks BX7000 Multi-Access Gateway enables operators to evolve their networks cost effectively to deploy new services, while reducing the cost of backhauling services such as voice, video and data traffic. The BX7000 is a cell site access platform with a rich set TDM, ATM, Ethernet, DSL, IP and MPLS features to support both legacy (2G and 3G) and next-generation (WiMAX and LTE) mobile technologies.

The BX7000 is a compact 17.5 x 2.6 x 9.4 in (44.5 x 6.7 x 24 cm), which enables ease of deployment in a cell site cabinet where rack space is limited. Additionally, it is available in an environmentally hardened form factor for deployment scenarios where cabinets will have additional exposure to natural elements.

The BX7000 provides an industry-leading range of port densities and interface types:

- 16 T1/E1 - RJ48C interfaces: TDM, ATM IMA, software configurable
- 3 Ethernet interfaces, Fast Ethernet and Gigabit Ethernet that can be used either user-side or network-side or for management access
- One console access interface
- One USB interface for console and one USB interface for flash drive
- Alarm relay block
- Expansion slot for an optional interface module designed to provide additional T1/E1 and Ethernet port density or access for DSL uplinks

- Expansion slot for an advanced timing module, providing a number of clocking options:
 - External sync input
 - IEEE 1588 v2
 - Synchronous Ethernet support
 - Line clocking (T1/E1)

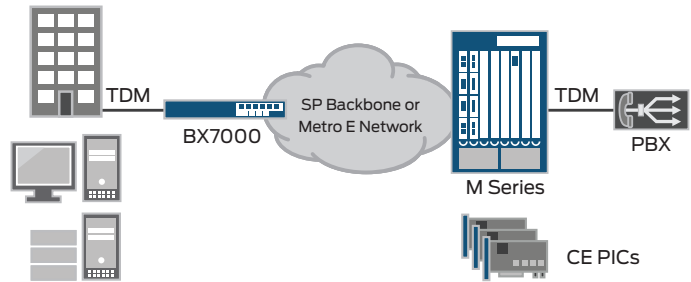


Figure 2: Wireline application of BX Series and circuit emulation PICs: TDM/ATM aggregation at CPE.

Features and Benefits

The BX7000 is a hardened and compact system designed for deployments in cell sites. The primary application for the BX7000 is mobile backhaul over IP or MPLS networks, providing the full suite of features tailored for the backhaul market.

Key features include:

- Small form-factor
- Optionally hardened chassis
- Comprehensive suite of IP/MPLS features
- Open slot provides interface flexibility
- Various options for timing and synchronization
- Zero-touch configuration support

FEATURE	ADVANTAGE	BENEFIT
Small form-factor purpose-built for cell sites	<ul style="list-style-type: none"> • Matches requirements of cell sites with sizing and pricing • Provides temperature hardening for elemental exposure 	Provides optimal solution to wireless operators' backhaul problem: addresses the current bottleneck while reducing OPEX
Interface modularity	Provides range of backhaul options with modular interface slots	Simplifies sparing strategy for operators even as they use a variety of backhaul technologies (DSL, Ethernet, T1/E1, and so on) across their network
Multiple clocking options	Offers a wide range of clocking options with optional advanced clocking module	Allows operators to pick clocking strategy of their choice: T1/E1 line timing, synchronous Ethernet, BITS, adaptive and IEEE 1588 v2, DSL NTR
Zero-touch provisioning	Allows BX7000 to configure itself out-of-the-box without manual intervention	Enables mass deployment of BX7000 at minimal operational cost
IP/MPLS-based metro backhaul architecture	Leverages Juniper's unique experience with multiservice networks, including a decade of IP/MPLS leadership with Junos® operating system; works in both IP/MPLS and IP-only networks	Allows service providers to consolidate multiple technologies, including multiple base-station vendors, on a converged backhaul network
Junos Scope for provisioning and monitoring	Provides advanced solution for both provisioning and monitoring pseudowires	Provides a guaranteed interoperability solution for provisioning pseudowires (keeping operations simple and lower cost) and monitoring them (helping the carrier's service reliability)



BX7000

Specifications

This section lists basic specifications for the BX7000. For further details, refer to the hardware installation manuals on www.juniper.net/techpubs/hardware.

Dimensions (W x H x D)

- 17.5 x 2.6 x 9.4 in (44.5 x 6.7 x 24 cm)

Weight (lb/kg) Fully Configured

- 16.5 lb (7.5 kg)

Power (DC/AC)

Option 1:

- DC [-48 V telco nominal or +24 VDC nominal] -40° to 70° C operation

Option 2:

- DC [-48 V telco nominal or +24 VDC nominal] -5° to 55° C operation

Option 3:

- Universal AC 100-240 V nominal, 50/60 Hz, -5° to 55° C operation

Maximum Power Draw

- 65 W max

Operating Temperature

- -40° to 158° F (-40° to 70° C) for DC hardened option
- 23° to 131° F (-5° to 55° C) for DC non-hardened option
- 23° to 131° F (-5° to 55° C) for AC option

Humidity

- 95% RH noncondensing

Noise level

- 0dB (acoustic noise) (negligible - only passive cooling is used)

Approvals

Safety Approvals

- CAN/CSA-C22.2 No. 60950-1-03 - UL 60950-1
- EN 60950-1
- EN 60825-1
- EN 60950-1 – CB Scheme

EMC

- AS/NZS CISPR22 Class B
- EN55022 Class B
- VCCI Class B
- FCC Part 15 Class B

Immunity

- EN-61000-3-2 Power Line Harmonics
- EN-61000-3-3 Voltage Fluctuations and Flicker
- EN-61000-4-2 ESD
- EN-61000-4-3 Radiated Immunity
- EN-61000-4-4 EFT
- EN-61000-4-5 Surge
- EN-61000-4-6 Low Frequency Common Immunity
- EN-61000-4-11 Voltage Dips and Sags

ETSI

- ETSI EN-300386-2 Telecommunication Network Equipment, Electromagnetic Compatibility Requirements

NEBS

- SR-3580 NEBS Criteria Levels (Level 3 Compliance)
- GR-63-CORE: NEBS, Physical Protection
- GR-1089-CORE: EMC and Electrical Safety for Network Telecommunications Equipment

Telecomm Compliance

- RTTE Directive 1995/5/EC
- T1 and XDSL Interfaces
 - FCC Part 68
 - Industry Canada CS-03
 - JATE Green Book
 - TBR 21 (XDSL only)
- E1 Interface
 - TBR 12/13
 - ACA TS016
 - G.703

Management

- Element Management: CLI, NETCONF
- Policy Management: Junos Scope
- SNMP: SNMP v2/v3 bilingual agent support

Juniper Networks Services and Support

Juniper Networks is the leader in performance-enabling services and support, which are designed to accelerate, extend, and optimize your high-performance network. Our services allow you to bring revenue-generating capabilities online faster so you can realize bigger productivity gains and faster rollouts of new business models and ventures. At the same time, Juniper Networks ensures operational excellence by optimizing your network to maintain required levels of performance, reliability, and availability. For more details, please visit www.juniper.net/us/en/products-services/.

Ordering Information

MODEL NUMBER	MODEL NAME AND DESCRIPTION
BX7000BASE-AC	BX7000 base unit: 2 open slot chassis, 16 built-in T1/E1 Ports, 3 built-in 10/100/1000 ports (optics sold separately), passive cooling, 1 AC power supply, and optional cards sold separately
BX7000BASE-DC	BX7000 base unit: 2 open slot chassis, 16 built-in T1/E1 ports, 3 built-in 10/100/1000 ports (optics sold separately), passive cooling, 1 DC power supply, optional cards sold separately*
BX7000BASE-DC-H	Hardened BX7000 base unit: 2 open slot chassis, 16 built-in T1/E1 ports, 3 built-in 10/100/1000 ports (optics sold separately), passive cooling, 1 DC power supply, optional cards sold separately (-40 to +70 degree centigrade operation)*
PWR-BX7000-AC-R	BX7000 AC redundant power supply option (ordered with base unit)*
PWR-BX7000-DC-R	BX7000 DC redundant power supply option (ordered with base unit)*
PWR-BX7000-DC-H-R	BX7000 hardened redundant DC power supply option (-40 to +70 degree centigrade operation)
PWR-BX7000-AC-S	BX7000 AC power supply spare*
PWR-BX7000-DC-S	BX7000 DC power supply spare*
PWR-BX7000-DC-H-S	BX7000 hardened DC power supply spare*

* All power cords are sold separately

About Juniper Networks

Juniper Networks, Inc. is the leader in high-performance networking. Juniper offers a high-performance network infrastructure that creates a responsive and trusted environment for accelerating the deployment of services and applications over a single network. This fuels high-performance businesses. Additional information can be found at www.juniper.net.

Corporate and Sales Headquarters

Juniper Networks, Inc.
1194 North Mathilda Avenue
Sunnyvale, CA 94089 USA
Phone: 888.JUNIPER (888.586.4737)
or 408.745.2000
Fax: 408.745.2100
www.juniper.net

APAC Headquarters

Juniper Networks (Hong Kong)
26/F, Cityplaza One
1111 King's Road
Taikoo Shing, Hong Kong
Phone: 852.2332.3636
Fax: 852.2574.7803

EMEA Headquarters

Juniper Networks Ireland
Airside Business Park
Swords, County Dublin, Ireland
Phone: 35.31.8903.600
EMEA Sales: 00800.4586.4737
Fax: 35.31.8903.601

To purchase Juniper Networks solutions, please contact your Juniper Networks representative at 1-866-298-6428 or authorized reseller.

Copyright 2010 Juniper Networks, Inc. All rights reserved. Juniper Networks, the Juniper Networks logo, Junos, NetScreen, and ScreenOS are registered trademarks of Juniper Networks, Inc. in the United States and other countries. All other trademarks, service marks, registered marks, or registered service marks are the property of their respective owners. Juniper Networks assumes no responsibility for any inaccuracies in this document. Juniper Networks reserves the right to change, modify, transfer, or otherwise revise this publication without notice.